

True 4K

UX2DMP7.0

UX2D's MP7.0 media player is built for professional digital signage installations. The MP7.0 delivers true 4K video technology.



Rugged Device



Wide Temperature



Robust 16GB eMMC Storage



Content Rotation



Support Touch



True 4K

Amazing Quality



Superior Utility



Dynamic Content

Pre-Load Option



The UX2D MP7.0 can come pre-loaded with either UX2D-Basic or UX2D-Pro SaaS software to reduce the overall set-up process and costs for deployment.

Minimal Maintenance

The robust UX2D MP7.0 is designed for 24/7 usage with self-recovery mechanism and a fanless cooling system for minimal maintenance and maximum running time.

Easy and Flexible Usability

So much power is packed into such a small form factor. UX2D content management is centralized and remote. You can control playback schedule as well as turn on and off display all at your fingertips.

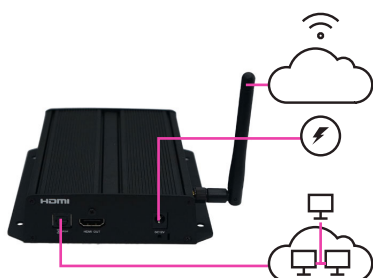

Technical Specification

Open Standards & Video Format Supported

- Android 7.1 API
- H.265/HEVC up to 4K (3840 x 2160)
- H.264/AVC up to 1080p (1920 x 1080)
- MPEG-4 up to 1080p (1920 x 1080)
- MPEG-2 up to 1080p (1920 x 1080)
- MPEG-1 up to 1080p (1920 x 1080)
- VC-1 up to 1080p (1920 x 1080)

Image Format Supported

- JPEG up to 1920 x 1080
- PNG up to 1920 x 1080

Added Open Standards Supported for Pro

- HTML5, JavaScript, and CSS
 - W3C SMIL for cross-platform management
 - W3C Widgets for HTML delivery
- WebKit-based browser engine, same as Google Chrome™ and Apple Safari® browsers

Digital Signage Features

- Auto-play starts playing scheduled contents automatically when power is re-established
- Automatic error recovery with built-in WDT
- Real-time clock with backup clock battery

Network

- Wireless: 802.11 b/g/n
- Gigabit Ethernet
- Optional 3G/4G mobile module via USB

Ports

- HDMI 2.0 (3840 x 2160 @ 60fps)
- 3.5mm analog stereo audio out
- S/PDIF out
- USB 2.0 x 2
- Micro USB for ADB

Local Storage

- 16 GB eMMC built-in
- Micro SD card slot (card replaces internal storage)

Mounting Kit

- Built-in wall mount bracket

Supplied Accessories

- HDMI cable
- External 2dB Wireless antenna
- Velcro
- Power/Micro SD card brackets

Expansion Options

- 16GB/32GB micro SD/SDHC memory card

Power Requirements

- Input: 100-240V, 50-60 Hz, 0.5A Max.
- Output: 12V, 1.5A
- UL/CB/PSE certified power supplies

Environmental

- Operating temperature: -20 to 50°C / -4 to 122°F
- Humidity: 10 to 85% @ 45°C(113°F), non-condensing
- Shock: IEC 60068-2-27 Table A.1 (railway related)
- Vibration: 1.5G @ 5-200Hz, random

Dimensions for Product and Package

- Size: 143.60mm x 128.13mm x 33.65mm / 5.65" x 5.04" x 1.32"
- Weight: 478g / 1.05lbs.
- Individual Package Size: 226mm x 172mm x 89 mm / 8.89" x 6.77" x 3.5"
- Weight 841.5g / 1.85lbs.
- Outer Carton Size: 482mm x 390mm x 245mm / 18.97" x 15.35" x 9.64"
- Units per Outer Carton: 10

Certifications

- CE / FCC / IC / RoHS

Warranty

- 1-year limited parts & labor